




TUBES FROM PERFORATED COLD AND HOT ROLLED MATERIAL

TUBI DA NASTRO FORATO LAMINATO A FREDDO O A CALDO

* The diameter has to be measured at 150mm from the edge.
Il diametro deve essere misurato a 150 mm dalla estremità.

Usually available from the pickled strip DD11.
Generalmente disponibili da nastro a freddo DD11.

Usually available from cold rolled strip DC01.
Generalmente disponibili da nastro a freddo DC01.

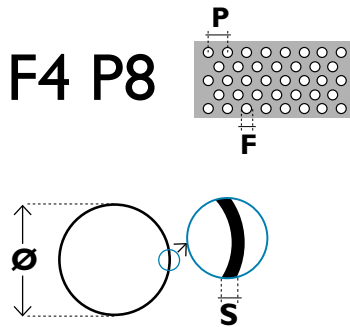

Weight and availability table / *Pesi e gamma produttiva*

Ø OD Ø Esterno mm	OD Tolerances* Tolleranza	Theoretic weight kg / m - <i>Pesi teorici kg / m</i>		
		Nominal thickness mm - <i>Spessori nominali mm</i>		
		1,20	1,50	2,00
28,00	+/-1,0%	0,65	0,81	-
32,00		0,74	0,93	-
40,00		0,93	1,16	1,45
42,00		0,98	1,22	1,52
48,00		1,11	1,39	1,74
50,00		1,16	1,45	1,81
54,00		1,25	1,57	1,96
60,00		1,39	1,74	2,17
63,00		1,46	1,83	2,28
70,00			2,03	2,54
73,00			2,12	2,65
76,30			2,21	2,77
80,00			2,32	2,90
88,90			2,58	3,22
100,00			2,90	3,62
101,60			2,95	3,68
105,00			3,05	3,81
120,00			3,48	4,35
123,00			3,57	4,46
124,00			3,60	4,49
125,00			3,63	4,53
127,00			3,69	4,60
129,00			3,74	4,68
130,00			3,77	4,71
132,00			3,83	4,78
133,00			3,86	4,82
134,00			3,89	4,86
136,00			3,95	4,93
138,00		4,01	5,00	
139,00		4,03	5,04	
140,00		4,06	5,07	
143,00		4,15	5,18	
145,00		4,21	5,26	
150,00		4,35	5,44	
153,00		4,44	5,55	

